

Sigtronics Control Yoke PTT Switch P/N 100702

Sealed aluminum alloy case. Terminals suitable for soldering. 1,000,000 cycles mechanical life.



ELECTRICAL: (at 28 VDC or 115 VAC, 60/400 Hz.)

LOAD SINGLE CIRCUIT 2-CIRCUIT

Resistive 5 Amps 4 Amps

Inductive 3 Amps 2 Amps

Lamp 2 Amps —

Low Level Option: 30 mV @ 10 ma. for 25,000 cycles.

MATERIALS:

Case: Aluminum alloy, anodized.

Button: Thermoplastic.

Seal: Internal silicone rubber.

Terminals: The terminals are suitable for soldering.

OPERATIONAL:


Operating Force: 1.7 lbs. ±.5 lbs.

Mechanical Life: 1,000,000 cycles.

Electrical Life: 25,000 cycles.


Dielectric Withstanding: 1050 Vrms.

Temperature Range: -55°C to +85°C. operation.

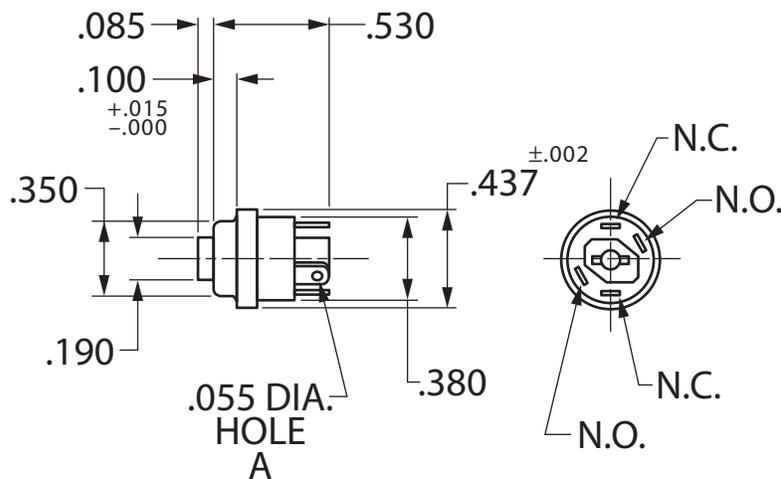

N.C.: Normally Closed

N.O.: Normally Open

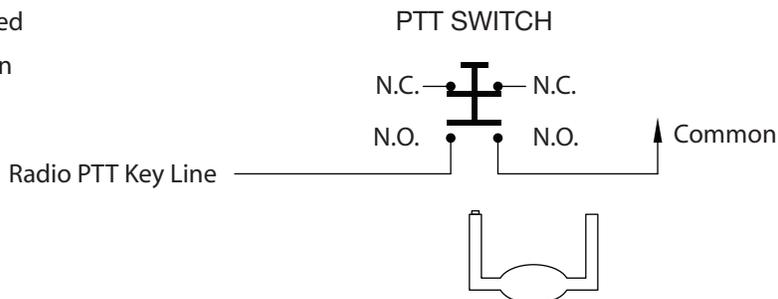

Made in the U.S.A.

Specialists in "SOUND" Management

San Dimas, California • www.sigtronics.com • (909) 305-9399