
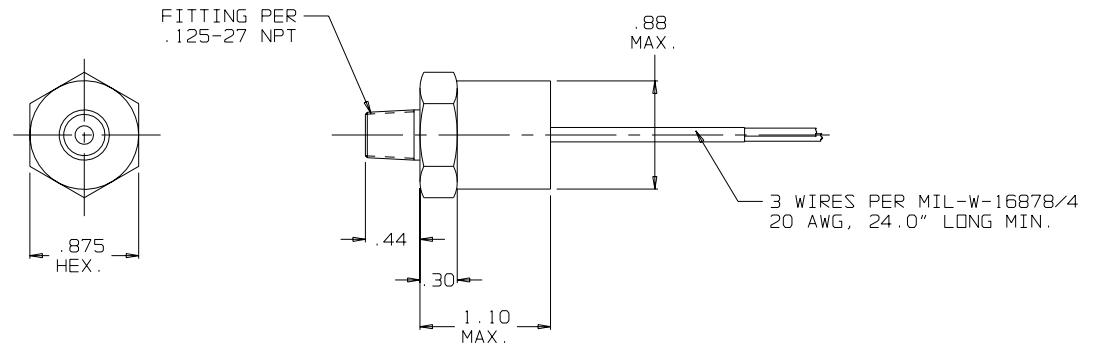



NOTES:

- OPERATION: UNIT ACTUATES ON INCREASING PRESSURE AT 1600.0±50.0 PSIG AND DEACTUATES ON DECREASING PRESSURE AT 1200.0 PSIG MIN.
- PRESSURES: OPERATING: 0-2000 PSIG
PROOF: 2500 PSIG
BURST: 4000 PSIG
- ELECTRICAL RATING: 5.0 AMPS RESISTIVE AT 28 VDC.
- MEDIA: HYDRAULIC OIL
- TEMPERATURE: -65°F TO 275°F
- MATERIALS IN CONTACT WITH MEDIA: 300 SERIES STAINLESS STEEL, POLYIMIDE, AND NITRILE.

REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL
-	NO ECN PRELIMINARY ISSUE	12-3-09	JMF

UNCONTROLLED COPY



		MATERIAL	UNLESS OTHERWISE SPECIFIED DIM. ARE IN INCHES AFTER PLATING INTERPRET DRAWING PER 000-STD-100 DRILLED HOLE LIMITS PER AND10387 THREADS PER MIL-S-7742 BREAK SHARP EDGES .003/.015 FILLET RADII .005/.020 MACHINED SURFACE 63 RMS PER ANSI B46.1 MACHINED SURFACES ON A COMMON AXIS CONCENTRIC WITHIN .005 T.I.R. ⊥ AND ∥ WITHIN .002/IN.	DWN. BY JOHN NATOLI 12-3-09	 UNITED ELECTRIC CONTROLS PRECISION SENSORS DIVISION 50 Seenan's Lane, Milford CT. 06460 USA	
		FINISH	TOLERANCE FRACTIONS ±1/32 ANGLES ±2° .X DEC. .XX DEC. .XXX DEC. ±.030 ±.015 ±.005	CHKD. BY 12-3-09 DMD		TITLE PRESSURE SWITCH
				ENGR. 12-3-09 JMF		SIZE B
				RLSE.		CODE IDENT NO. 14314
USED ON	NEXT ASSY			CONTRACT NO.	DWG. NO. P12M-158	
APPLICATION DATA					SCALE 1/1 WEIGHT SHEET 1 OF 1	